



Photogrammetry – Current Data Services Description

Last updated: September 2023

This document describes our standard data services, as well as terminology, criteria, standards, and limitations for data accepted and produced by Propeller. Services not explicitly defined herein are subject to a separate scoping process and terms of service.

Product Specifications

Annual Platform Access

The Annual Platform Access Fee includes:

- 30 “Bring Your Own Data” (BYOD) Credits (see chart below for specifications)
- 40 annual standard users
- 4 TB storage
- No restrictions are applied to users or storage during the first full year as a Propeller customer, thereafter customers may purchase additional users or storage at each annual renewal.
- Additional credits can be purchased in packs of 15, 30, 55, or 110 Credits and have the same specifications in the chart below.

	Included BYOD Pack
Credits	30 credits
Pre-processed Data per Credit	4 gigapixels (GP)
Max Pre-processed Data per Upload	40 GP
Point Cloud per Credit	100M points
Max Point Cloud per Upload	1B points
Number of Sites	Unlimited

Bring Your Own Data” (BYOD) Pack Details

- A pre-processed credit is defined as an output from your photogrammetry processing solution or other survey data sources in GeoTIFF format.
- The site must be in a projected system, and the upload must match the site CRS. Pre-processed data in WGS84 GeoTIFF cannot be updated into published or local sites. However, if you have existing WGS84 GeoTIFF assets and need to import this historical data into the platform, please reach out to our Sales Engineers so that we can assist you with the transition process.

Requirements

- One digital elevation model (DEM) and/or one orthophoto GeoTIFF file.
 - GeoTIFF files should have unique names if you upload more than one to the platform.
 - Your orthomosaic should be 4 bands RGB+Alpha (instead of 5 bands).
- DEM should have a 32-bit floating-point sampling. An integer sampling creates a stepped elevation phenomenon across the model, making it unreliable.
- 8-bit color channels

Pre-Processed Credit Sizes

Standard pre-processed Credit size: 4,000 megapixels, referring to the resolution of the GeoTIFF files uploaded.

- For clarity, this includes GeoTIFFs with dimensions of just over 63,000 x 63,000 pixels height and width; or 40,000 x 100,000, or 10,000 x 400,000.
- You can upload a matching orthophoto (colored RGBA) image and a DEM (greyscale) image together. The limit applies to the larger file of the pair.
- Pixels are counted regardless of their transparency.

What Other Pre-Processed Data Can Be Uploaded?

Pre-processed Point Clouds

- LAS or LAZ (zipped LAS) format in the site coordinate system.

Design Surfaces and Spatial Overlays

- Design surfaces (georeferenced PDF, DXF, TTM, IFC, KML, KMZ or LandXML (CgPoints and Surfaces only))
 - Maximum file size is 500MB and 300 MB for IFC files.
 - 3DFACE or MESH surface layers containing more than 1,000,000 faces will not be displayed and cannot be used for measurement purposes.
- Linework (KML, KMZ, DXF)
 - For linework, files less than 2MB display better in the platform.
 - Keep individual file sizes below 20MB.
- Georeferenced elevation models (DEM GeoTIFF).
- Customers are able to upload any of the surfaces or overlays above as desired but will be held to the 4TB storage limit per platform license.

File Storage

- Unreferenced image files (such as PNG or PDF).
- 4TB total storage available per portal.

Annual Processing Pack

Customers may choose from the list of Credit Packs or Unlimited Packs in the chart below. Additional processing packs may be purchased without incurring an additional annual platform fee.

Annual Processing Pack Comparison

Pack Type	Credit Pack	Unlimited Pack - 40 gigapixels (GP) per upload limit	Unlimited Pack - 70 GP per upload limit	Unlimited Pack - 100 GP per upload limit	Unlimited Pack - 217 GP per upload limit
Credits	Usually 15, 30, 55, or 110	Unlimited	Unlimited	Unlimited	Unlimited
Drones	Unlimited	1	1	1	1
Gigapixels (GP) per Credit	20 GP	-	-	-	-
Max GP per Upload	200 GP	40 GP	70 GP	100 GP	217 GP
Ground Control Points (GCP) per Credit	40 GCP	-	-	-	-
Max GCP per Upload	400 GCP	80 GCP	80 GCP	80 GCP	80 GCP
Check-points	Unlimited (fair usage up to 2,400 applies)	Unlimited (fair usage up to 2,400 applies)	Unlimited (fair usage up to 2,400 applies)	Unlimited (fair usage up to 2,400 applies)	Unlimited (fair usage up to 2,400 applies)
Point Cloud per Credit	100M points	-	-	-	-
Max Point Cloud per Upload	1B points	300M points	300M points	300M points	300M points
Number of Sites	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited

Processing Pack Type Details

- Each image:
 - Must be at least 8 megapixels.
 - Must be geotagged.
 - Must have a filename with fewer than 255 characters.
 - Should have less than 30mm of motion blur, otherwise, the effectiveness of stitching images is reduced leading to low accuracy in the final model.
 - Must have an acceptable aspect ratio and ISO for your camera's specifications.
- Each upload:
 - Must be one contiguous area. This is to avoid excessively long processing times and ensure accuracy in the resulting 3D model.
 - Must have at least 10 images with the same aspect ratio.

Credit Pack Details

- Additional Credits will be charged for:
 - Each additional GP over the stated credit limit.
 - Each additional 40 GCP over the stated limit.

Unlimited Pack Details

- If you attempt to upload a dataset that is more than your allotted gigapixel maximum you can:
 - Use composite surveys.
 - Purchase a credit pack.
 - Upgrade to a higher gigapixel limit pack.
- Propeller's systems automatically restrict your uploads to the single drone device you have registered to the license. Certain packs restrict usage to recommended drones and supported drones only. If you're unsure of your purchase, contact your Account Manager.
- Replacing your drone:
 - Propeller will provide a method for limited self-service temporary drone replacements.
 - If you replace your drone or drone's camera device, you will need to contact Propeller support to update your license.
 - When you add new drones, contact your Account Manager to discuss additional licenses.

Expiration and Data Retention

Dataset Credit Expiration

- At the end of the term determined in their contract, customers will lose access to the platform unless they have renewed their subscription.
- Unused dataset credits, including oversized surveys purchased within the platform, will expire and no longer be usable at the end of the term.
- Dataset credits do not roll over into the next term.
- Dataset credits cannot be exchanged for refund or discount.

Platform Data Retention

- As a platform user, you can delete data that you no longer need or is no longer relevant to your project. Once deleted, the data is irrecoverable.
- If you let your platform license expire, your data will be deleted permanently after 14 days, unless you renew your license before then or purchase paid hosting. After 14 days, your data is irrecoverable, even if you do eventually renew.
- Click to read more about our [Data Retention Policy](#).

AeroPoint Survey Data Retention

- If you let your AeroPoint subscription expire, you will still be able to access and download all AeroPoint surveys that were processed before the subscription expired.
- AeroPoint surveys that are uploaded while the AeroPoint subscription is expired will be blocked from processing or downloading until the subscription is resumed.

Hardware-only Customer License Types

Annual AeroPoint Processing Subscription

- To process the data from AeroPoints, hardware-only customers must maintain the annual AeroPoint subscription, which is included with the purchase of new AeroPoints for the first 12 months.
- Subscription covers:
 - AeroPoints simple user workflow, including hotspot uploading.
 - The AeroPoints Dashboard provides multiple outputs, including processing reports and battery

- health.
- The ability to process coordinate data in multiple methods: Propeller Correction Network, user supplied known point method, and user supplied RINEX file.
- Simple processing in public or local grids (with Trimble and Topcon local site calibration workflows).
- The hosting, permission-based sharing and organization of data over time.
- Any active software license or Annual Propeller PPK subscription includes the AeroPoints subscription.
- More information about this subscription can be found [here](#).

Annual Propeller PPK subscription

- To process the PPK-geotagged images, hardware-only customers must maintain the annual Propeller PPK subscription.
- Photos are processed with high accuracy geotags, and the data can only be processed with AeroPoints and supported by Propeller PPK solution drones.
- This subscription covers:
 - The Propeller PPK algorithm and AeroPoints simple user workflow, including hotspot uploading.
 - The web-based software service that enables PPK tagging of images.
 - The AeroPoints Dashboard, which provides multiple outputs, including processing reports and battery health.
 - The ability to process coordinate data in multiple methods: Propeller Correction Network, user supplied known point method, and user supplied RINEX file.
 - Simple processing in public or local grids (with Trimble and Topcon local site calibration workflows).
 - The hosting, permission-based sharing, and organization of data over time.
- Any software license includes PPK and AeroPoints processing.
- More information about this subscription can be found [here](#).

Limitations

Certain limitations apply to hardware-only customers, including but not limited to:

- AeroPoint groups can only contain a maximum of 20 AeroPoints.
- Customer support via phone is not available.
- Customer support may take up to one business day to respond.
- AeroPoint corrections data may take up to 24 hours to retrieve.

Supported UAS and Coordinate Systems

Drones and Camera Systems

Recommended Drones

Recommended drones have specifically been selected for optimization with Propeller PPK and will provide the best user experience.

- DJI Phantom 4 RTK
- DJI Mavic 3 Enterprise
- WingtraOne Gen I

- WingtraOne Gen II
- DJI M300/M350 with Zenmuse P1
- Quantum Trinity F90+

Supported Drones

Supported drones are compatible with the Propeller Platform, but may have limited functionality and will not support the complete PPK solution.

- DJI Phantom 4 Pro
- DJI Phantom 4 Pro V2
- DJI Zenmuse X7 - Matrice 210 RTK V2
- SenseFly S.O.D.A - Ebee
- SenseFly Aeria X - Ebee

See all supported drones [here](#).

Drone Support

- Full support and training on data capture and upload (DJI P4RTK, DJI M300 / M350 with Zenmuse P1, DJI M3E, DJI P4P).
- Support for data upload only (Wingtra, Quantum).

Propeller PPK

- For hardware-only customers, Propeller PPK requires a subscription to annual corrections.
- When uploading imagery captured with drones that are compatible for use with Propeller PPK, each upload must include the following file types:
 - DJI: BIN and MRK.
 - Wingtra: SBF and JSON. Include only the original FlightName WingtraOne.SBF and FlightName.JSON files. Geotagging within WingtraHub will result in additional SBF and JSON files, do not upload these to the platform.
 - Quantum: UBX and PROP.
- Each drone flight must be captured completely within the duration of the corresponding AeroPoint survey.

User Supplied RINEX Data

RINEX data can be self supplied for processing. This is the [list](#) of all compatible antenna types.

AeroPoint Surveys

- AeroPoint surveys can be processed using the RINEX Upload Method, which uses the user supplied data to process AeroPoint coordinates.

PPK Surveys

- While the Propeller Corrections Network is the simplest way to process a PPK survey, you can process PPK data with RINEX data.

In both of these cases, the accuracy of the final model will depend on the accuracy of the supplied RINEX file.

Coordinate Reference Systems (CRS)

Typically Continuously Operating Reference Stations (CORS) publish the data in 24 hours and store them for a certain period – generally 30 days or less for the majority of networks. Some store longer term, but they reduce the quality after 30 days. If a base station has no available data for 12 hours, we will manually check and fetch data from other nearby stations if they exist, which may delay the process. After the 12 hour mark, we will use any in-range base station data, rather than wait for the closest.

Supported CRS :

- Many ellipsoid and geoid datums, and many published projected systems.
- Most JXL and GC3 local calibrations.

Propeller Corrections Network (PCN) allows users to have their AeroPoints processed and corrected without the need for local ground control markings to be made.

To use PCN on your site:

- The site needs to be within range of a PCN base station (check in [this map](#)).
- The station needs to provide data in a compatible CRS.

To definitively find out whether your desired setup is supported, please [contact us](#).

Data Processing

Propeller Processing Methods

Each survey dataset uploaded to Propeller is transformed into a 3D site model by our processing engine, using our proprietary algorithms and photogrammetric tools.

We support the processing of survey datasets:

- With or without GCPs (AeroPoints and/or custom GCPs).
- Submitted with standard accuracy or high accuracy (PPK or RTK) geotags.
- Using the Propeller PPK solution.

Propeller PPK

Photos are processed with high accuracy geotags, and the data can be processed with / without customer GCPs and AeroPoints.

- PPK geotags can be processed using the following methods:
 - Propeller Correction Network (PCN)
 - Known Point (Global Site Survey Benchmark)
 - Known Point (Local Site Survey Benchmark)
 - User supplied RINEX
- For the Known Point methods, if the PCN is available, it may be used automatically to help increase the quality of the geotags.
- For more details on Propeller PPK, please refer to [this article](#).

Non-Propeller PPK

Photos can be standard accuracy or other high accuracy (PPK or RTK) geotags. The data can be processed with or without customer GCPs and/or AeroPoints.

- AeroPoints can be processed using the following methods:
 - Propeller Correction Network (PCN)
 - Known Point (Global Site Survey Benchmark)
 - Known Point (Local Site Survey Benchmark)
 - User supplied RINEX
 - Unreferenced (Unreferenced uses coarse GNSS locations and only provides relative accuracy)
- Customer GCPs
- Without GCPs

Downsampling

We typically downsample dense cloud data by 1:4 during processing. Our testing has shown that this reliably provides accurate results when best data capture practices are followed. For example, if the captured GSD was 2 cm/pixel, the downsampled dense cloud will be 8 cm/pixel. This allows us to reduce processing time for large datasets, and we perform further downsampling for very large datasets. Here are our thresholds for downsampling when building the dense cloud:

- They are based on the total number of pixels in the source photos, measured in gigapixels (GP).
- They have been designed to rarely be used. Between January 1, 2021 and May 17, 2021, less than 2% of surveys exceed any of these thresholds.

	Thresholds for each pack type		Results	
Downsampling when an upload exceeds the relevant threshold	Credit packs	Unlimited Packs	DEM GSD compared to what was captured	Point cloud density compared to what's possible to reconstruct
1:8	60 GP	90 GP	8 x	1/64 x
1:16	120 GP	180 GP	16 x	1/256 x

If you need to avoid heavy downsampling, you can survey the same area and stay underneath these thresholds by:


- Flying higher with less overlap.
- Subdividing the survey into smaller areas for processing and creating a composite afterwards.

Standard Processing & Delivery Timeframe

Expected Processing Times

Photogrammetry surveys captured using the Propeller PPK with AeroPoints workflow, one of our [recommended drones](#), and our [best practices](#) can expect faster processing times.

The following is a chart that shows the average photogrammetry survey processing times for our fastest top 10 and top 25 customers. The data is grouped by upload size to indicate how quickly surveys can be processed when using best practices.

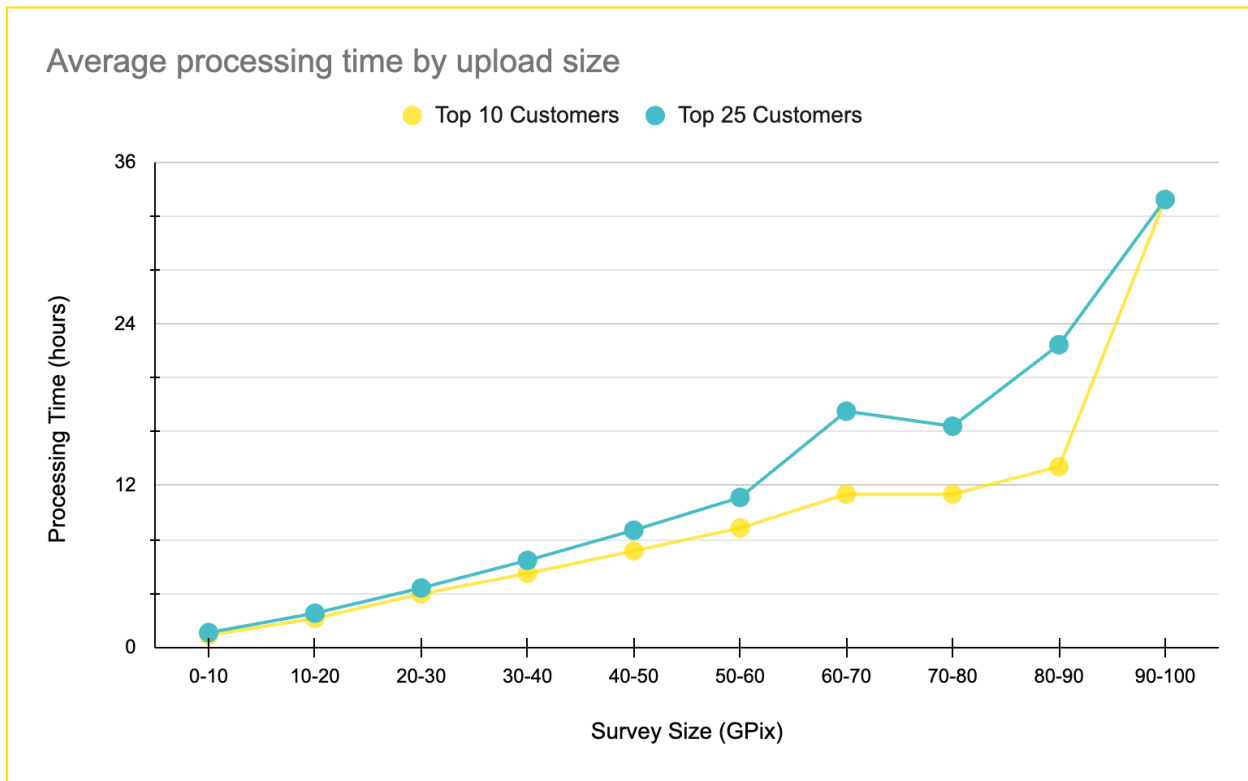

The above chart averages processing data from surveys uploaded between February 1, 2023 to July 31, 2023. Customers have uploaded a minimum of 12 surveys per year to be included.

Factors that Extend Processing Time or Delay Delivery

1. If your dataset is larger than 40 GP.
2. Your data requires manual fixes due to non-ideal or unrecommended collection methods.
3. If your AeroPoints corrections data is delayed. Processing can only begin once the corrections data is available. *For urgent jobs, use the [Known Point Method](#).*
4. User input errors at upload (incorrect information, incomplete files, etc.).
5. Ground control point (GCP) identification errors or missing GCPs.
6. Corrupt images or photo geotags.
7. Lengthy delays responding to processing questions or clarifications requested by Propeller staff.
8. Using non-standard outputs, such as tiled models.

Processing Time Commitment

The following are the processing and delivery timeframes we uphold when processing your survey data. Our commitment is to meet these timeframes for at least 90% of all uploads. For your dataset to be eligible for these timeframes, it must:

- Be captured using a [supported drone](#).
- Have GNSS corrections data available within 12 hours of submission (if using the Propeller Corrections Network).
- Have high-accuracy geotags on images (PPK or RTK) and/or visible and accurately marked GCPs.
- Not include any factors that extend processing times (as described above).


The processing and delivery timeframe is defined as the time taken for the dataset to be first available for the customer to review following a successful upload.

Upload Size	Up to 20 gigapixels (GP)	20 to 40 GP	40 to 60 GP	60 to 80 GP	80 to 100 GP	>100 GP
Processing & Delivery Timeframe	24 hours	36 hours	48 hours	60 hours	60 hours	Custom

AeroPoint surveys that follow [best practices](#) generally come back within 24 hours.

Surveys up to 20 GP are often delivered in less than 12 hours. For datasets larger than 100 GP we are unable to guarantee a time frame due to the complexity of processing these large datasets.

To illustrate what typical processing times look like, the following chart shows the percentage of datasets grouped by upload size (GP) that achieve the listed timeframes:

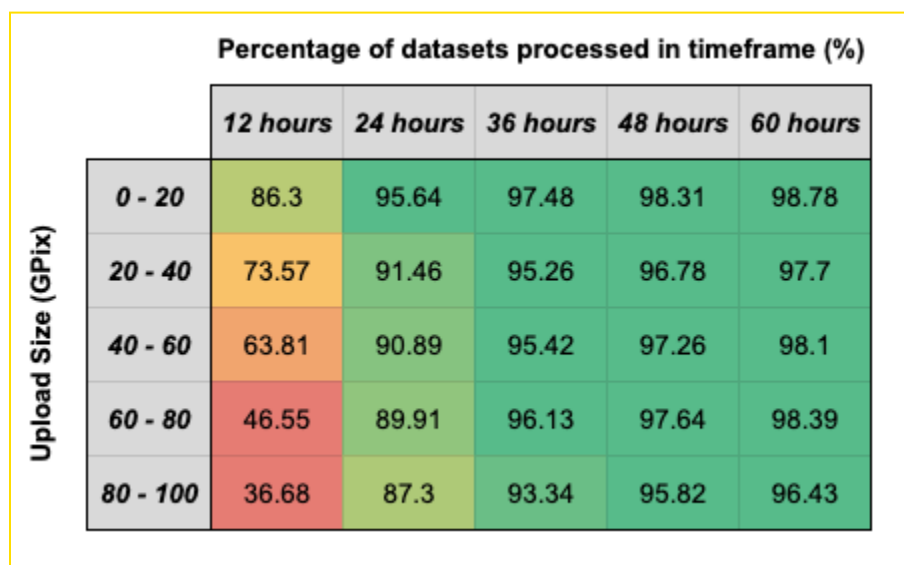

The above chart is based on data from surveys uploaded between February 1, 2023 to July 31, 2023.

Calculating the Number of Gigapixels In Your Survey

A gigapixel (GP) is a unit of measure that is used to calculate how large a survey dataset upload is. It is defined as one billion (10⁹) pixels. To calculate how many gigapixels are in your survey, you can use the following formula:

$$\text{Survey size} = \text{resolution of camera} \times \text{number of images}$$

For example:

- If you surveyed an area using a Mavic 3 Enterprise (20MP sensor) and captured 1000 images, your total survey size would be 20 GP.

- If you surveyed an area using a Matrice 300 with a P1 camera (45MP sensor) and captured 1000 images, your total survey size would be 45 GP.

Factors that Lead to Processing Rejection

Sometimes datasets uploaded into Propeller will be deemed “unusable” after our Data Success team has completed a thorough investigation. In these scenarios, if we are unable to create a model from the data, we reserve the right to reject the uploaded survey after communicating with the customer.

Some examples of when we will need to reject a dataset include, but are not limited to:

- PPK surveys with majority low-fix geotags or low quality AeroPoints due to AeroPoint placement and/or short flights.
 - For a PPK survey using an AeroPoint 1, short flights are less than 10 minutes.
 - For a PPK survey using an AeroPoint 2, short flights are less than 2 minutes.
 - If using the Known Point Method for AeroPoint corrections, short flights are less than 10 minutes if using any other method for AeroPoint corrections.
- Severe motion blur.
- Extremely under / overexposed images.
- Images are all water or tall trees/dense vegetation.
- Insufficient photo overlap. We recommend a minimum of 70% at a standard flight height of 80-120 meters AGL but 75%-80% is optimal where there is a lot of change in topography.

Customers will be notified when their dataset has finished processing and is ready to view in the platform.

We will also contact you if:

- We have questions about the data that must be answered before processing can continue.
- There are any processing delays.
- Changes were made to any of the options selected during upload (ex. Excluding GCPs that were not captured in any of the photos).
- We find any issues during our Quality Assurance & Control Process that prevents us from releasing the survey.

If we do not receive a response from the customer in a reasonable timeframe (typically 2 weeks from when the dataset was uploaded), and after we have made multiple attempts to contact the customer, we may reject the survey and send a notification email as mentioned above.

Reprocessing or Refiltering Requests

Propeller is able to reprocess or refilter datasets on request. This may incur additional credit usage on credit-based packs.

Quality Assurance & Control

Quality and Control Improvement

Each ground-controlled dataset uploaded to Propeller is expertly transformed into a 3D site model by our processing engine, using our proprietary algorithms and photogrammetric tools.

Each survey is also reviewed by our highly experienced Geospatial Specialists to ensure the highest quality outcome. Some of our most common quality-improvement tasks include, but are not limited to:

- Offsetting moderately incorrect geotags from multiple flights for standard accuracy surveys.
- Assessing and selectively removing low-quality images that may degrade the site model.
- Validating the accuracy of geotags.
- Omitting GCPs that degrade the site model.
- Validating and adjusting image alignment in the site model.
- Attempting imagery alignment with adjusted camera calibration.

The level of troubleshooting will depend on the selected Quality Assurance setting at the time of upload. Propeller offers Strict, Moderate, and Lenient Quality Assurance settings where customers can select the option appropriate for the accuracy required of the dataset, as well as the option to "Skip all QA" for the fastest turnaround time possible:

- Strict ensures that datasets will be checked using the highest standards and tightest thresholds.
- Lenient uses looser thresholds which generally leads to faster processing times.
- Skip all QA has no troubleshooting hold ups which leads to fastest turnaround time because the entire processing is done automatically and it opts out of quality assurance entirely. The same level of accuracy can still be achieved provided that data capture is good.

Quality Assurance Setting	Internal Accuracy Threshold (GCP error)	Consistency Threshold (Comparison with previous survey)
Strict	0.05 m 0.16 ft/USft	0.1 m 0.33 ft/USft
Moderate	0.1 m 0.33 ft/USft	0.2 m 0.66 ft/USft
Lenient	0.2 m 0.66 ft/USft	0.4 m 1.31 ft/USft

Processing Report

For every survey dataset we process, a Processing Report is generated that shows how well your provided data matches the surface we created. It includes:

- Ground control summary
- Ground control RMS errors
- Camera locations
- DEM surface checkpoints
- Filter analysis
- Camera quality analysis

This report can be viewed, shared, and printed from the platform.

Ensuring Consistency

When a site has been surveyed more than once, we compare overlapping survey results to ensure consistency between survey products. If both surveys have ground control, we evaluate whether they line up horizontally and

vertically within standard error tolerances. We also check for any shifts or misalignment between images and for unexpected surface differences (not caused by vegetation or earthworks).

Deliverables

Standard Data Outputs Generated by Propeller

Propeller's photogrammetry processing services turn your drone images into actionable 3D data, delivered directly to your portal in the Propeller Platform. There, you can visualize and interact with your 3D surveys to measure and manage your worksites with our specialized tools.

We generate industry-standard spatial data products that will seamlessly integrate with your other systems, including but not limited to Trimble Business Center, Civil 3D, and Autodesk.

From the platform, the following standard output deliverables are available for download in the site's coordinate system, unless stated otherwise. Source imagery can also be made available for download upon request.

Site Model:

- DXF in 3 resolutions (100k, 250k and maximum achievable faces)*
- TTM (Trimble Stratus only)*
- 2.5D textured model (OBJ format)**

Terrain:

- DSM GeoTiff
- DTM GeoTiff (for datasets that were processed using any of our filter options)
- Contours
 - DXF (non georeferenced*)
 - 1 m intervals for sites set up with meters
 - 1 ft/USft and 2 ft/USft for sites set up with feet or US feet

Orthophoto:

- GeoTIFF in WGS 84
- GeoTIFF
- JFIF/JPEG full resolution (zipped with world files)
- JFIF/JPEG lower resolution (zipped with world files)

Point Cloud:

- LAZ in WGS 84
- LAZ
- LAZ (Reduced point count)

Propeller exports AeroPoint survey data in the following formats:

- CSV
- PDF
- KML

Propeller exports PPK image tags in the following format:

- CSV

**While Northing and Easting information is included, the coordinate reference system (CRS) is not included in the metadata of the files. The corresponding CRS will need to be set when loading into a third-party software.*

***The 3D textured model OBJ file uses an arbitrary coordinate system, referenced to 0,0,0.*

Custom Data Outputs Created by Customers in the Propeller Platform

From your Propeller platform, you can also create and export some custom data products by creating a measurement polygon. These include:

- DXF Outline
- KML
- DXF Surface (triangles)
- DXF Contours (1 unit interval)
- Point Cloud (customizable point count in LAS, LAZ or CSV format)
- Orthophoto (customizable orthophoto in GeoTIFF or JPEG format)
- TTM Surface (Trimble Stratus)

We test each file format to ensure they are compatible and performing as they would in your portal. You can read more about the third-party software that supports our exports [here](#).

Composite Datasets Created by Customers in the Propeller Platform

In the platform, you can create composites of up to 25 partial surveys or pre-processed datasets once they have completed processing.

The composite will become available as a new dataset, for which all measurement and analysis tools will be available, with the exclusion of terrain cleanups. However, terrain cleanups from its partial are carried over to the composite. Whole-site deliverables in the FILES modal are not available for composite surveys, but surfaces and orthophotos can be exported through the Custom Data Outputs Created by User in the platform. Custom point cloud export is not yet supported for composites.

Crew

Crew provides an easy way to share interactive maps with design, earthworks quantities, and location information between the office and the field. Crew includes:

- 2D site overview
- Map details
- Design file overlays
- Real-time GPS location

Customer Support

Customer Support

Propeller offers multiple avenues for customer support.

- In-Platform Support
 - 24/7 Live Chat Support

- [Knowledge Base](#)
- [PropellerU video training library](#)
- Customer Success Support
 - Software license customers have access to a Customer Success Engineer during local business hours.
- Hardware Support
 - Software license customers have access to Hardware Support for assistance with hardware needs via phone, email and chat during local business hours. This includes:
 - Airspace Unlocks
 - Hardware troubleshooting for the DJI Phantom 4 RTK, M300 with P1 and Mavic 3 Enterprise
 - AeroPoints assistance
 - Hardware-only customers have access to Hardware Support via email or chat for assistance with hardware needs. This includes:
 - AeroPoints assistance
 - PPK upgrade assistance
 - Customers using a WingtraOne drone need to engage with both Wingtra's support team and Propeller's support team, depending on the issue. More information about whom to contact for support when using a WingtraOne drone can be found [here](#).
 - Customers using a Quantum Trinity F90+ drone need to engage with both Quantum's Support team and Propeller's Support team, depending on the issue. More information about whom to contact for support when using a Quantum drone can be found [here](#).
- Non-English support limitations
 - The Propeller Platform is available in French, German, Japanese, Spanish, Italian, and Czech.
 - Propeller is only able to provide chat, email or phone support in English. Local dealers may be able to provide support in local languages. Contact your dealer for more information.

Data We Do Not Accept

Propeller does not currently accept or provide support for:

- Thermal and Multispectral Imagery
- Pre-processed Tiled 3D Models
- Unreferenced image files for spatial overlay
- Unprocessed LiDAR point clouds
- Shapefiles or geodatabase files

Data Services We Do Not Provide

To ensure that we can maintain quick high-quality service to all of our customers, Propeller does not engage in extensive manual data preparation, such as:

- Processing datasets requiring excessive manual tie points or where 50% of photos cannot be aligned. Examples include, but are not limited to, sites covered extensively by: *water, tree canopies or thick vegetation, corrugated roofs, reflective or highly uniform surfaces, close-up inspection of repetitive surfaces and trusses.*
- Creating geotags for images without human-readable log files.

- Manually adjusting brightness and exposure of images.
- Manually aligning imagery with unacceptably poor overlap (*less than 60%*).
- Manual acquisition or manipulation of CORS correction data for surveys older than one month.
- Removing sky from source imagery.

Privacy and Security

You can learn more about Propeller's privacy and security policies [here](#).